



Archived resources

For further resources and
documentation please visit us:
www.cinos.net

Minimal Proprietary Compression Video Over IP Decoder with KVM

NMX-DEC-N1233 (FGN1233-SA), Stand Alone

NMX-DEC-N1233-C (FGN1233-CD), Card



Overview

The new NMX-DEC-N1233 model features improved digital pixel reproduction and reduces latency to an industry leading 10-ms for gigabit links. Packetized video streams not only remain visually lossless throughout distribution, they also arrive instantly. It has separate HDMI and VGA/RGB inputs, supports PoE and has a separate SFP port. The SFP fiber path allows visually lossless video to be routed on a fiber-only network and extend signals beyond the reach of category cable. Added USB connectivity will enable users to extend USB over IP for touch-enabled and KVM applications.

The N1000 Series Encoders and Decoders are an affordable local AV over IP switching solution that packetizes video into a minimally compressed IP format to create anywhere from a small 2×1 seamless presentation switcher up to a large 32×32 matrix switcher by connecting them directly to off-the-shelf layer-3 network switches.

The ability to send IP Media for distribution using common managed network switches in any size and configuration makes N1000 solutions extremely flexible and easy to deploy.

Common Applications

- The NMX-DEC-N1233 is the perfect solution for any low-latency application and video matrix smaller than 32x32. Common applications include classrooms, conference rooms, performing arts, and sports bars.

Features

- **Output Scaling** – Video scaling at output allows seamless switching from any source, at any resolution, to any display or projector, while preserving video fidelity.
- **1 Frame Latency** – Same as HDBaseT.
- **Minimal Proprietary Compression (MPC)** – Visually lossless MPC algorithm applied to all resolutions.
- **Optional Compression** – Available option to disable all compression.
- **Power Over Ethernet (PoE)** – PoE eliminates the need for power supply.
- **Infrared (IR)** – Infrared emitter connection allows control of low-cost, IR-only display devices.
- **Onboard Control** – All N-Series encoders and decoders have on-board, built-in control capability via events that can trigger any number of TCP/UDP commands to other IP controllable devices.
- **Unmatched Flexibility** – Highly competitive pricing for matrices up to 32x32.
- **SFP Fiber/RJ45 Ports** – Encoder features SFP fiber/RJ45 copper network ports with USB control inputs for KVM-over-IP keyboard and mouse operation.
- **Stand Alone or Card** – Available as a stand alone device, or card for use with NMX-ACC-N9206.

Specifications

VIDEO	
Digital Video Input	Network video over Ethernet via RJ45 port or fiber via 1G SFP port
Video Output	HDMI, DVI-D (through adapter)
Formats	HDMI, DVI-D (through adapter), HDCP content protection support
Output Resolutions	Supports most common HD up to 1920x1200. See website for all supported resolutions.

AUDIO	
Input Signal Types	Network video over Ethernet via RJ45
Output Signal Types	Embedded audio on DVI-D or HDMI (through adapter)
HDMI Audio Formats	8ch PCM
Analog Audio Format	Stereo 2-channel
Digital-to-Analog Conversion	16-bit 32 kHz, 44.1 kHz and 48 kHz (matched to Encoder settings)

LATENCY	
Latency	10 ms at 60 fps
Note:	<ul style="list-style-type: none">• This is the combined encode plus decode latency. Total latency from source to screen will also include any network latency.• Scaling adds one frame of latency (17ms at 60fps)

COMMUNICATIONS	
Ethernet	<p>P0 10/100/1000 Mbps, auto-negotiating, auto-sensing, full/half duplex, DHCP, Auto IP, and Static IP</p> <p>P1 1 Gbps port which accepts compatible fiber transceivers or</p>

	direct attach cables (fiber or copper cabling)
PORTS	
+12V 2A	One 12 Volt DC power input
P0	8-wire RJ45 female 10/100/1000 Mbps 10/100/1000Base-T auto-sensing gigabit Ethernet switch port Provides network connection to the Encoders and Decoders
P1	SFP port (SFP fiber transceiver or direct attach cable not included) for MPC compressed networked AV video Provides network connection to the Encoders and Decoders
IR	2-pin terminal Phoenix connector Provides Infrared (IR) output only (33-60 kHz; typically 39 kHz). Emitter may be necessary (not included)
RS232	3-pin terminal Phoenix connector Provides a serial control interface. Full duplex communication. Available terminal speed settings: 1200-115200 baud rate
AUDIO	5-pin terminal Phoenix connector Provides user-selectable balanced/unbalanced output Dedicated audio output
HDMI OUT	HDMI video output
USB connectors (front panel)	USB-B control input and two USB-A control inputs
CONTROLS AND INDICATORS – FRONT PANEL	
RESET button	Recessed pushbutton. Press to initiate a 'warm restart' causing the processor to reset, but not lose power. A reset does NOT affect the current settings
ID button	Recessed pushbutton. Press to send a notification out on the network to identify the unit (the notification causes a pop-up dialog in N-Able and N-Command).
POWER LED	On solid (green) when operating power is supplied (via PoE or local power supply). This activity is also shown by the PWR LED on the rear panel.
STATUS LED	On flashing (green) when there is software activity. This activity is also shown by the STAT LED on the rear panel
CONTROLS AND INDICATORS – REAR PANEL	
PWR LED	Same as POWER LED described above


HDMI LED	On (green) when there is a connection to a valid video source
STAT LED	Same as STATUS LED described above
STRM LED	On (green) when the unit is streaming video

POWER SUPPLY	
Power Supply, External, Not Included	2.0 Amp @ 12 Volts DC; 100-240 Volts AC power supply; not included in shipment. NMX-ACC-N9312 (FGN9312)

ENVIRONMENTAL	
Temperature	32° to 104°F (0° to 40°C)
Humidity	10% to 90% RH (non-condensing)
Heat Dissipation	Up to ~44 BTU/Hr


GENERAL	
Dimensions (HWD)	1.05" x 7.888" x 5" (2.67 cm x 20.04 cm x 12.7 cm)
Weight	1.47 lbs (0.67 kg)
Mounting Options	Stand alone, surface mount, wall mount, or rack mount Surface and wall mounting requires (not included): •NMX-ACC-N9101 (FGN9101), Mounting Wings for SVSI N-Series Encoders and Decoders Rack mounting requires one of the following (not included): •NMX-ACC-N9102 (FGN9102), 1RU Rack Shelf for Two Side-by-Side for SVSI N-Series Encoders and Decoders •NMX-ACC-N9206 (FGN9206), 2RU Rack Mount Cage with Power for Six SVSI N-Series Card Units
Regulatory Compliance	FCC, CE, and NTRL
Recommended Accessories	•NMX-ACC-N9382 (FGN9382), 1RU Power Supply 16-Channel 12V for up to 16 SVSI N-Series Encoders and Decoders •NMX-ACC-N9101 (FGN9101), Mounting Wings for SVSI N-Series Encoders and Decoders •NMX-ACC-N9102 (FGN9102), 1RU Rack Shelf for Two Side-by-Side SVSI N-Series Encoders and Decoders •NMX-ACC-N9206 (FGN9206), 2RU Rack Mount Cage with Power for Six SVSI N-Series Card Units

N1233 Decoder Front View

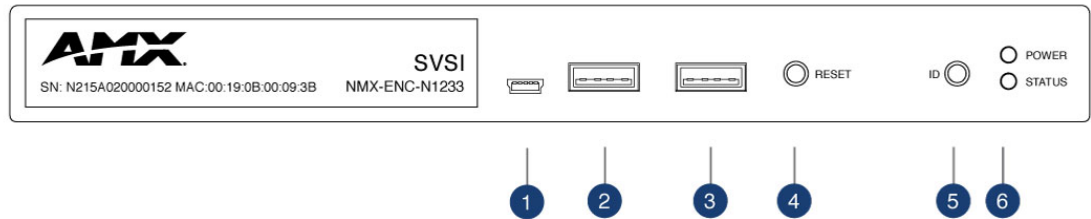

- | | |
|------------------------|-------------------------------|
| 1) USB-B Control Input | 4) Device reset button |
| 2) USB-A Control Input | 5) Device ID discovery button |
| 3) USB-A Control Input | 6) Power/Status indicators |

NMX-DEC-N1233 Rear View

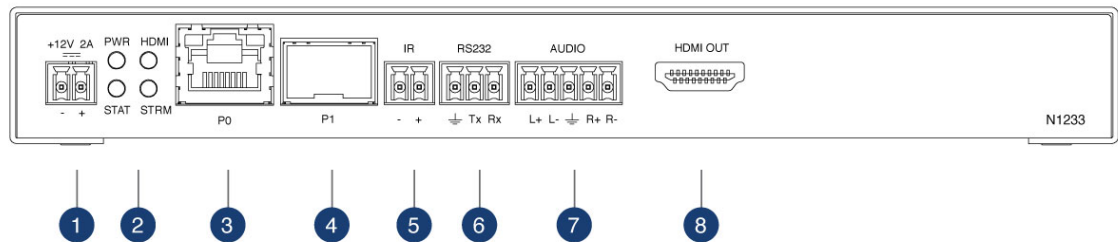


- | | |
|--|-------------------------------------|
| 1) 12VDC Input (not needed with POE) | 5) Infrared (IR) emitter connection |
| 2) Status Indicators | 6) RS232 connection |
| 3) RJ-45 auto-sensing gigabit Ethernet switch port – POE (Power Over Ethernet) | 7) Analog Audio Input connection |
| 4) SFP fiber connector | 8) HDMI Video Out |

About AMX by HARMAN

Founded in 1982 and acquired by HARMAN in 2014, AMX® is dedicated to providing AV solutions for an IT World. AMX solves the complexity of managing technology with reliable, consistent and scalable systems comprising control, video switching and distribution, digital signage and technology management. AMX systems are deployed worldwide in conference rooms, classrooms, network operation/command centers, homes, hotels, entertainment venues and broadcast facilities, among others. AMX is part of the HARMAN Professional Group, the only total audio, video, lighting, and control vendor in the professional AV market. HARMAN designs, manufactures and markets premier audio, video, infotainment and integrated control solutions for the automotive, consumer and professional markets. Revised 3.21.16. ©2016 Harman. All rights reserved. Specifications subject to change.

www.amx.com | +1.469.624.7400 | 800.222.0193



For further resources and
documentation please visit us:

www.cinos.net