



# Archived resources

For further resources and  
documentation please visit us:  
**[www.cinos.net](http://www.cinos.net)**



## VP-12x8

### 12x8 Computer Graphics Video Matrix Switcher

---



Compatible with HDTV component video signals when used with a breakout cable such as the Kramer C-GM/3RVF.



The VP-12x8 is a high-performance matrix switcher for computer graphics video signals, with resolutions up to and exceeding UXGA on 15-pin HD connectors. It can route any or all inputs to any or all outputs simultaneously.

## FEATURES

---


- High Bandwidth - 380Mhz.
- HDTV Compatible.
- Memory Locations - Stores multiple switches as presets to be recalled and executed when needed.
- Take Button - Executes multiple switches all at once.
- Front Panel Control Lockout.
- Control - RS-232 (K-Router™ Windows®-based Kramer software is included), Ethernet & IR Remote (included).
- Worldwide Power Supply - 100-240V AC.
- Standard 19" Rack Mount Size - 1U. Rack "ears" included.



## VP-12x8

### TECHNICAL SPECIFICATIONS

INPUTS:	12 UXGA on 15-pin HD connectors.
OUTPUTS:	8 UXGA on 15-pin HD connectors.
MAX. OUTPUT LEVEL:	2Vpp.
BANDWIDTH (-3dB):	380MHz.
DIFF. GAIN:	0.06%.
DIFF. PHASE:	0.03Deg.
K-FACTOR:	<0.05%.
S/N RATIO:	71.5dB @5MHz.
CROSSTALK (all hostile):	-49dB @5MHz.
COUPLING:	DC.
CONTROLS:	RS-232, Ethernet & IR remote.
INDICATORS:	8-character display on the front panel.
POWER CONSUMPTION:	100-264V AC, 50/60Hz; 12VA.
DIMENSIONS:	19" x 7" x 1U W, D, H, rack mountable.
WEIGHT:	2.7kg (6lbs) approx.
INCLUDED ACCESSORIES:	Power cord, null-modem adapter, Windows® based Kramer control software, infrared remote control transmitter, rack "ears".

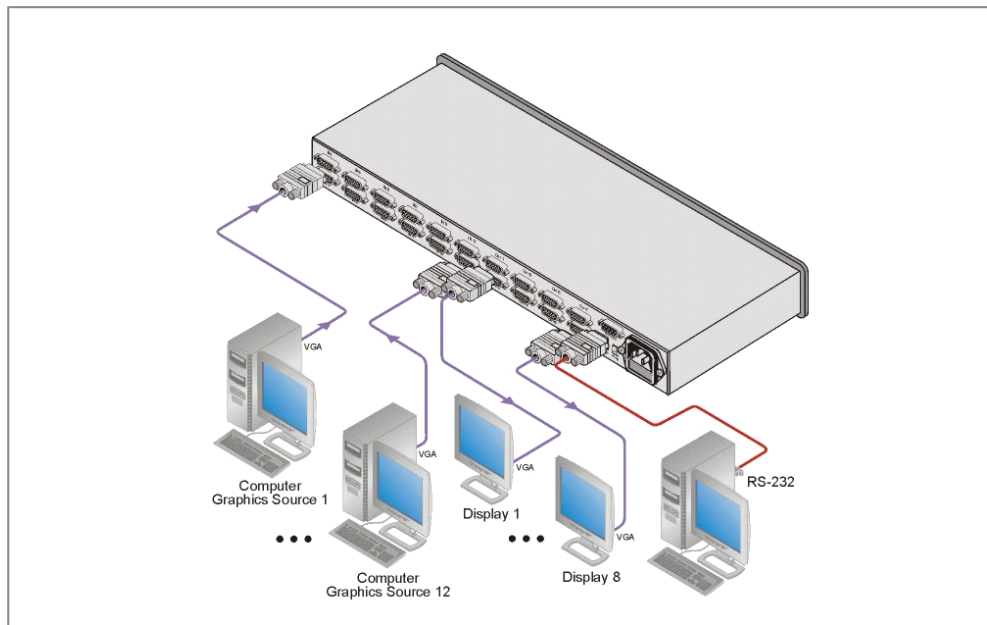

For further resources and  
documentation please visit us:  
**[www.cinos.net](http://www.cinos.net)**