



# Archived resources

For further resources and  
documentation please visit us:  
**[www.cinos.net](http://www.cinos.net)**



## VP-200xIn

### 1:2 Computer Graphics Video Line & Distribution Amplifier

---



Compatible with HDTV component video signals when used with a breakout cable such as the Kramer C-GM/3RVF.



The VP-200xIn is a high-performance line and distribution amplifier for computer graphics video signals with resolutions up to and exceeding UXGA. It provides controls to compensate for signal losses inherent in long cable runs.

## FEATURES

---


- High Bandwidth - 400MHz (-3dB).
- HDTV Compatible.
- Level (Gain) and EQ (Peaking) Controls.
- ID Bit Control.
- AC/DC Coupling Selection - Individually for R, G, & B signals.
- Compact Kramer TOOLST™ - 3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter.



## VP-200xIn

### TECHNICAL SPECIFICATIONS

INPUT:	1 UXGA on a 15-pin HD (F) connector.
OUTPUTS:	2 UXGA on 15-pin HD (F) connectors.
MAX. OUTPUT LEVEL:	2Vpp.
BANDWIDTH (-3dB):	400MHz.
DIFF. GAIN:	0.05%.
DIFF. PHASE:	0.03Deg.
K-FACTOR:	<0.05%.
S/N RATIO:	71dB.
CONTROLS:	Level: -1.5dB to +6.1dB, EQ.: 0 to +7.3dB @50MHz.
COUPLING:	AC/DC.
POWER CONSUMPTION:	12V DC, 95mA.
DIMENSIONS:	12cm x 7.15cm x 2.76cm (4.7" x 2.8" x 1.08") W, D, H.
WEIGHT:	0.3kg (0.66lbs) approx.
INCLUDED ACCESSORIES:	Power supply, mounting bracket.
OPTIONS:	RK-3T 19" rack adapter.

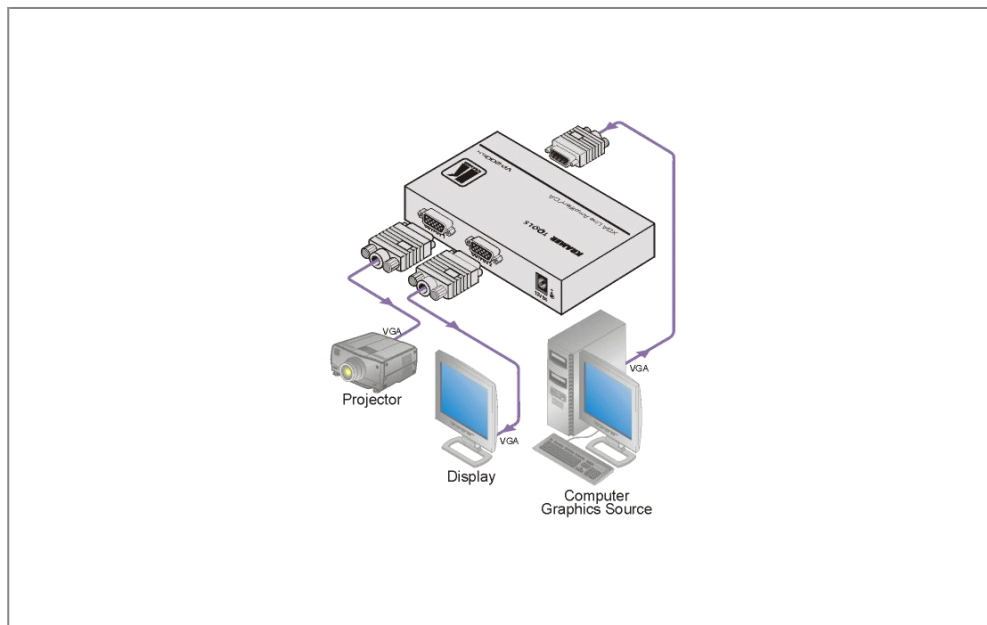

For further resources and  
documentation please visit us:  
**[www.cinos.net](http://www.cinos.net)**