



# Archived resources

For further resources and  
documentation please visit us:  
**[www.cinos.net](http://www.cinos.net)**

# NEC MultiSync® P801

Order Code: 60003481

NEC LCD 80" Large Format Display

The Reference MultiSync® P801 is the flagship model in the new P Series range, giving the ultimate size and quality image for content that will capture the imagination and attention of your visitors. The display can be pre-configured before it is installed via our innovative new Android App and NFC sensor offer saving installation time and cost. A focus is also placed on reducing power consumption and lowering running costs with the LED backlighting and Human Sensor which can manage the power of the display depending upon viewer proximity.

This display is ideal for any heavy duty application from retail to control rooms or as a projector replacement in high brightness meeting rooms and can be combined with an integrated OPS WiDi.



## DELIVERING GENUINE BENEFITS

**Programmable Ambient Light Sensor** - for reduced power consumption and eye pleasing brightness levels.

**Future Ready with OPS Cable Free Expansion** - Upgrade the power of your display at any time without the need for external cables or devices.

**DICOM support**- for medical applications.


**Free Download of Multi-Display Management Software** - with NaViSet Administrator 2 you can manage all your connected display devices from a centralized location.



NaViSet  
Administrator 2

## OUTSTANDING PERFORMANCE

- **Reduce Installation and Operating Costs.** The combination of LED back lights, Intelligent Wireless Data (NFC), programmable Ambient Light Sensor and (optional) OPS Slot-in PCs delivers the lowest installation and operating cost of any public display on the market.
- **Intelligent Wireless Data (based on NFC).** The built-in near field communication (NFC) chip allows data to be read and written with a mobile phone or tablet PC. Using the NEC Android app the user can pre-configure the display e.g. LAN settings, language etc. by holding an NFC capable device close to the display. All data will be transferred to the screen without the display needing power. This reduces set up and installation time and cost.
- **Human Sensor.** Save on power and reduce operating cost when the display operates at a very low brightness level and only switches to a higher brightness when a person is nearby. This optional feature can also be used for creative signage to e.g. switch inputs automatically to change from entertainment to information when a person approaches the screen.
- **Interface Extension.** This slot offers unique flexibility for additional connections with the choice of adding a single digital or two analogue boards.

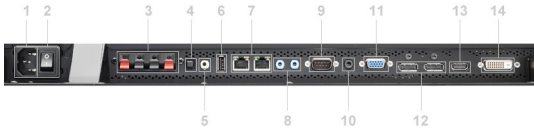

1. Power
2. Main Switch
3. Speaker connectors
4. Internal / External speaker switch
5. Audio out
6. USB port for service (firmware upgrades)
7. LAN daisy chain with SNMP (LAN switch and LAN / RS232 / remote loop through)
8. 2x Audio in
9. RS232 in
10. Remote in for external human / ambient sensor
11. VGA + Component input
12. DP 1.2 loop through
13. HDMI 1.4a
14. DVI-D

**SPECIAL CHARACTERISTICS**

Auto ID assignment, Auto tiling function, Automatic Alarm E-Mails, HTTP Server, Image flip, NaViSet Administrator 2, Point Zoom Function, Programmable 10-bit LUT with 3 memory banks, Sticky Note Function in OSD, User readable log function



**Energy Efficiency** Ambient light sensor; Carbon savings meter; ECOMode; Human Sensor

**Ecological Materials** Manuals on CD; Optional feet

<b>Technical Specification NEC MultiSync® P801</b>	
<b>DISPLAY</b>	
Panel Technology	UV² A with Edge LED backlight
Active Screen Area (W x H) [mm]	1,771.2 x 996.3
Screen Size [inch/cm]	80 / 203.2
Brightness (shipping) [cd/m²]	500, (700 max)
Contrast Ratio (typ.)	5000:1
Viewing Angle [°]	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Response Time (typ.) [ms]	4 (grey-to-grey)
<b>SYNCHRONISATION RATE</b>	
Horizontal Frequency [kHz]	31.5 - 91.1 (analog and digital)
Vertical Frequency [Hz]	50 - 85
<b>RESOLUTION</b>	
Native Resolution	1920 x 1080 at 60 Hz
Supported on DisplayPort and HDMI	1024 x 768; 1080i; 1080p; 1280 x 1024; 1280 x 768; 1360 x 768; 1600 x 1200; 1920 x 1080; 3840 x 2160 (24/30 Hz); 480p (60 Hz); 576p (50 Hz); 640 x 480; 720p (50/60 Hz); 800 x 600
Supported on HDMI only	1360 x 768; 3840 x 2160 (25 Hz); 4096 x 2160 (24 Hz); 480i (60 Hz); 576i (50 Hz)
<b>CONNECTIVITY</b>	
Input Video Analogue	1 x D-sub 15 pin
Input Video Digital	1 x DisplayPort (with HDCP); 1 x DVI-D (with HDCP); 1 x HDMI (with HDCP)
Input Audio Analogue	2 x 3,5 mm jack
Input Audio Digital	1 x HDMI; DisplayPort
Input Control	LAN 100Mbit; remote control wire (3,5mm jack); RS232
Output Video Digital	1 x DisplayPort; 1 x DVI-D; 1 x HDMI; 1 x Interface Extension Slot; 1 x OPS; 1 x through DisplayPort out
Output Audio Analogue	3,5mm jack
Output Control	LAN 100Mbit
Remote Control	LAN with SNMP; Remote Control IR (internal/external (optional) sensor); RS-232C (9-pin D-sub) Input
<b>INTERFACE EXTENSION SLOT</b>	
Slot Technology	analogue and digital interface extension (NEC standard)
<b>OPS OPTION SLOT</b>	
Slot Technology	Open pluggable specification (NEC / Intel OPS standard)
Inrush Current [A]	max. 10
Power Consumption [W]	max. 61
Voltage / Current [V/A]	16/4
<b>SENSORS</b>	
Ambient Light Sensor	Integrated, triggered actions programmable
Human Sensor	Optional, external, 4-5m range, triggered actions programmable
Temperature Sensor	Integrated, 3 sensors, triggered actions programmable
NFC Sensor	Integrated, 2cm range, free NEC Android App required
<b>ELECTRICAL</b>	
Power Consumption on Mode [W]	235 shipping; 430 (max.)
Power Savings Mode [W]	< 0.5 (ECO Standby); < 1
Power Management	VESA DPMS
<b>ENVIRONMENTAL CONDITIONS</b>	
Operating Temperature [°C]	+0 to +40
Operating Humidity [%]	20 to 80
<b>MECHANICAL</b>	
Dimensions (W x H x D) [mm]	Without stand: 1,836.2 x 1,061.3 x 86.9
Weight [kg]	Without stand: 61.5
Bezel Width [mm]	29.7 (left and right); 29.7 (top and bottom)
VESA Mounting [mm]	4 holes; 400 x 400 (FDMI); M8
<b>AVAILABLE OPTIONS</b>	
Accessories	Feet (ST-801); Speaker (SP-80 SM); Speaker (SP-RM1); Trolley (PDMHM-L); Wall mount (PDW T XL L+P)
Interface Extension	SB3-AB1 analogue: Audio; Component; Composite; S-Video SB3-AB2 analogue: Audio; RGBHV SB3-DB1 digital: 2 x HDMI
OPS	HD-SDI 1.5G,3G; HDBaseT receiver; Intel® Atom, Celeron and Core CPUs; WiDi receiver
<b>ADDITIONAL FEATURES</b>	
Colour Versions	Black Front Bezel, Black Back Cabinet
Safety and Ergonomics	C-tick; CE; FCC Class B; PSB; RoHS; TÜV GS; UL/C-UL or CSA; VCCI
Audio	Integrated Speakers (10 W + 10 W); Optional Speakers (15 W + 15 W)
Shipping Content	CD-ROM (User Guides/Manuals); Display; DVI-D cable; Power Cable; Remote Control
Warranty	3 years warranty incl. backlight

For further resources and  
documentation please visit us:  
**[www.cinos.net](http://www.cinos.net)**